

OFF ROAD Construction CURSOR 16

CURSOR 16
480 kW (653 HP) @ 2100 rpm
Stage IV / Tier 4 Final

SPECIFICATIONS



No. of cylinders / valves	6L / 4
Turbocharger	WG
Injection System	COMMON RAIL 2200 bar
Displacement	liters 15.9
Bore x Stroke	millimeters 141 x 170
Max power	kW (HP) @ rpm 480 (653) @ 2100
Max Torque	Nm @ rpm 2750 @ 2100
ATS	HI-eSCR
Certification	Stage IV / Tier 4 Final

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1477 x 927 x 1366
Dry Weight	Kg	1320

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

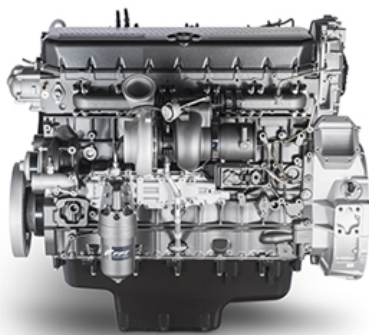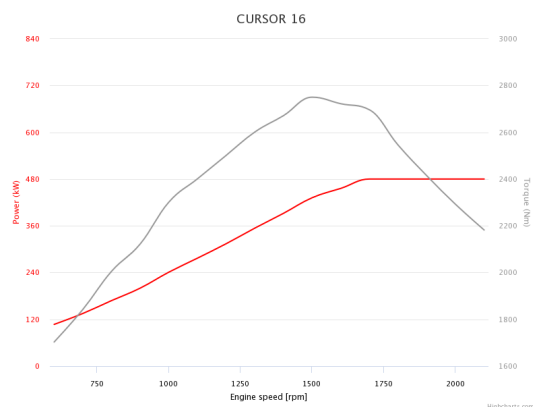

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

CONSTRUCTION

Do you want to know more?

LEGEND

Air Handling

TC (Turbocharged)
NA (Naturally Aspirated)
TCA (Turbocharged with aftercooler)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharge)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DPF (Diesel Particulate Filter)
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

