

OFF ROAD Construction CURSOR 9

CURSOR 9
260 kW (354 HP) @ 2100 rpm
Stage III A / Tier 3

SPECIFICATIONS



No. of cylinders / valves	6L / 4
Turbocharger	WG (TCA)
Injection System	COMMON RAIL
Displacement	liters 8.7
Bore x Stroke	millimeters 117 x 135
Rated power	kW (HP) @ rpm 260 (354) @ 2100
Max Torque	Nm @ rpm 1500 @ -
ATS	i-EGR
Certification	Stage III A / Tier 3

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1253 x 852 x 1008
Dry Weight	Kg	865

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

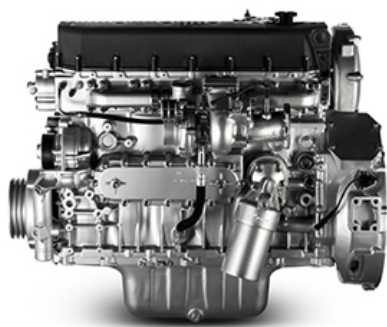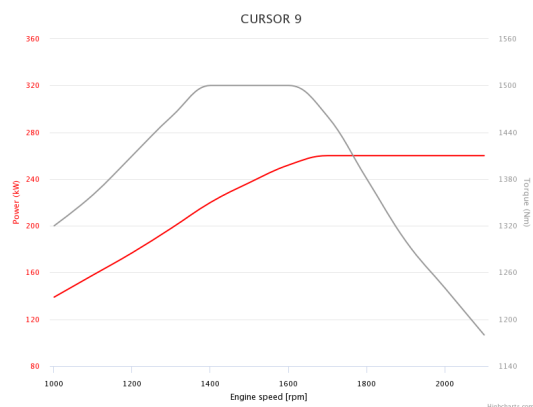

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

CONSTRUCTION

Do you want to know more?

LEGEND

Air Handling

TC (Turbocharged)
NA (Naturally Aspirated)
TCA (Turbocharged with aftercooler)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharge)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DPF (Diesel Particulate Filter)
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

