

OFF ROAD Construction N67

N67
187 kW (286 HP) @ 2200 rpm
Stage IV / Tier 4 Final

SPECIFICATIONS



No. of cylinders / valves	6L / 4
Turbocharger	WG
Injection System	COMMON RAIL 1600 bar
Displacement	liters 6.7
Bore x Stroke	millimeters 104 x 132
Rated power	kW (HP) @ rpm 187 (286) @ 2200
Max Torque	Nm @ rpm 1160 @ -
ATS	HI-eSCR
Certification	Stage IV / Tier 4 Final

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1062 x 687 x 1049
Dry Weight	Kg	530

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

POWER & TORQUE

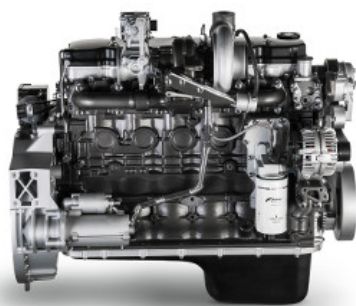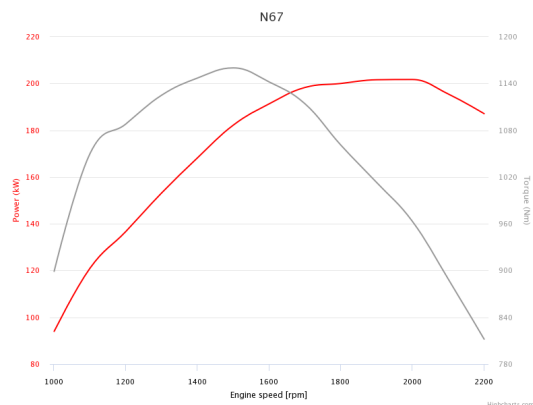

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

CONSTRUCTION

Do you want to know more?

LEGEND

Air Handling

TC (Turbocharged)
NA (Naturally Aspirated)
TCA (Turbocharged with aftercooler)

Turbocharger

WG (Wastegate)
VGT (Variable Geometry Turbocharger)
TST (Twin Stage Turbocharge)

Exhaust System

EGR (Exhaust Gas Recirculation)
SCR (Selective Catalytic Reduction)
DPF (Diesel Particulate Filter)
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

