

POWER GENERATION

G-Drive

N67

N67

165 kWm @ 1800 rpm

Tier 3


SPECIFICATIONS

Certification	Tier 3	
No. of cylinders	6L	
Injection System	ECR	
Air Intake	TAA	
Displacement	liters	6.7
Exhaust System	I-EGR	
Stand-by Power @ 1500 rpm	kWm	-
Prime Power @ 1500 rpm	kWm	-
Stand-by Power @ 1800 rpm	kWm	165
Prime Power @ 1800 rpm	kWm	150
Code	NEF67TE1X	

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1713 x 796 x 1230
Dry Weight	Kg	630

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

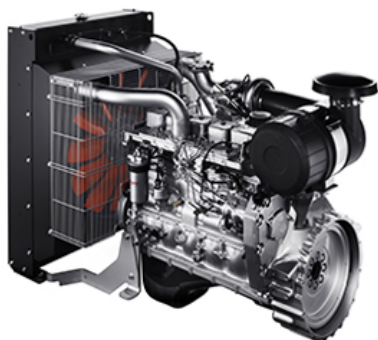

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

Do you want to know more?

LEGEND

Arrangement

L (in line)
V (90° "V" configuration)

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Injection System

M (Mechanical)
ECR (Electronic Common Rail)
EUI (Electronic Unit Injector)
MPI (Multi Point Injection)

MORE INFORMATION ABOUT CONFIGURATIONS AND ACCESSORIES AVAILABILITY, THROUGH THE WORLDWIDE FPT INDUSTRIAL DISTRIBUTORS NETWORK

NOT ALL MODELS, STANDARD EQUIPMENT AND ACCESSORIES ARE AVAILABLE IN ALL COUNTRIES. SPECIFICATIONS AND OPTIONS MAY CHANGE WITHOUT NOTICE

