

POWER GENERATION

G-Drive

N67

N67

202 kWm @ 1800 rpm

Tier 3


SPECIFICATIONS

Certification		Tier 3
No. of cylinders		6L
Injection System		ECR
Air Intake		TAA
Displacement	liters	6.7
Exhaust System		I-EGR
Stand-by Power @ 1500 rpm	kWm	165
Prime Power @ 1500 rpm	kWm	150
Stand-by Power @ 1800 rpm	kWm	202
Prime Power @ 1800 rpm	kWm	183
Code		NEF67TE2PV

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1713 x 796 x 1230
Dry Weight	Kg	630

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

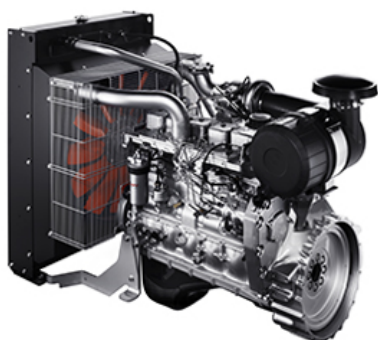

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

Do you want to know more?



LEGEND

Arrangement

L (in line)
V (90° "V" configuration)

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Injection System

M (Mechanical)
ECR (Electronic Common Rail)
EUI (Electronic Unit Injector)
MPI (Multi Point Injection)

MORE INFORMATION ABOUT CONFIGURATIONS AND ACCESSORIES AVAILABILITY, THROUGH THE WORLDWIDE FPT INDUSTRIAL DISTRIBUTORS NETWORK

NOT ALL MODELS, STANDARD EQUIPMENT AND ACCESSORIES ARE AVAILABLE IN ALL COUNTRIES. SPECIFICATIONS AND OPTIONS MAY CHANGE WITHOUT NOTICE

