


SPECIFICATIONS

No. of cylinders / valves	4L/2	
Injection System	COMMON RAIL 1600 bar	
Turbocharger	WG (TCA)	
Displacement	liters	2.8
Bore x Stroke	millimeters	91 x 108
Max power	kW (HP) @ rpm	55 (74) @ 2500
Max Torque	Nm @ rpm	375 @ 1400
ATS	DOC (Tier4F) / DOC - DPF (Stage V)	
Certification	Stage V - Tier 4 Final	


POWER & TORQUE

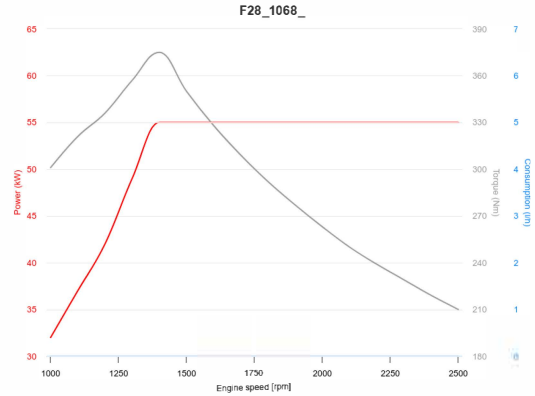

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	1144 x 729 x 980
Dry Weight	Kg	290

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

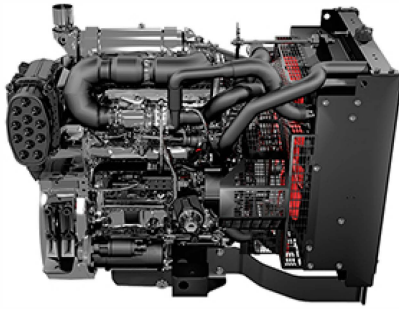

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER UNITS

Do you want to know more?



LEGEND

Air Handling

- TCA (Turbocharged with aftercooler)
- TC (Turbocharged)
- NA (Naturally Aspirated)

Turbocharger

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharger)

Exhaust System

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DOC (Diesel Oxidation Catalyst)
- DPF (Diesel Particulate Filter)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

